


279.00 EUR
 incl. 19% VAT, plus [shipping](#)

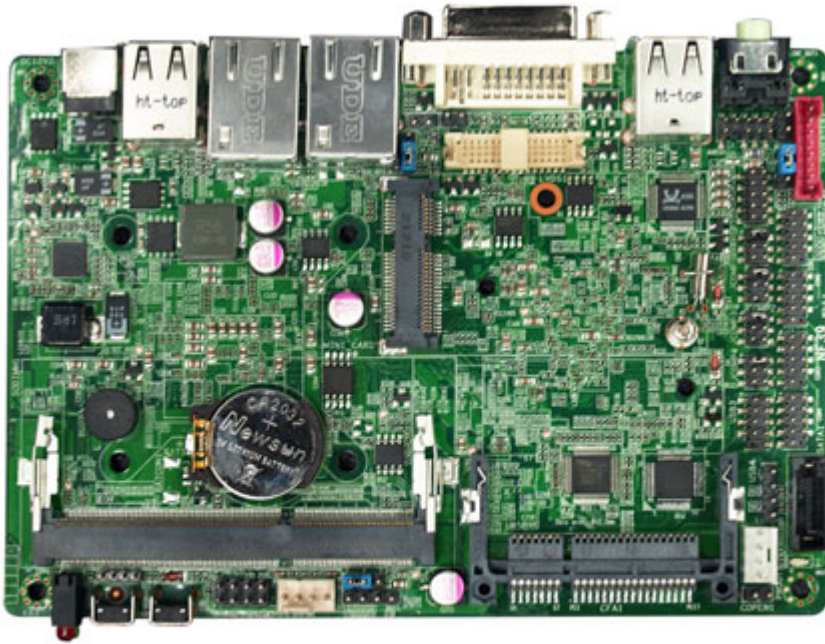

- INTEL® Celeron-M Processor 1047UE + HM65 Chipset
- Support 1 * DDR3 1066/1333MHz Single CH up to 8GB
- Support 1 * Serial ATAPII (6Gb/s) Devices
- Support CFAST card
- Support mSATA card (Share with Mini PCI-E)
- Support Mini PCI-E x 1
- Integrated Realtek ALC662 HD Audio CODEC with 2CH
- 1 * 24 bits Dual Channel LVDS header
- Support DVI-I Output
- Supports 2 * Realtek RTL8111F-CG Gigabit LAN
- Support CPU Smart FAN
- Support RS232/422/485 on COM1
- 148 x 102mm 3.5" SBC Form Factor

CPU	INTEL® Celeron-M Processor 1047UE (1.4GHz)
Chipset	INTEL®HM65 Express chipset
Memory	1 * DDR3 1066/1333MHz Single CH SO-DIMM up to 8GB
Expansion Slots	1 * MINI PCI-E
Storage	1 * Serial ATAPII 6Gb/s connector 1 * CFAST card socket 1 * mSATA (Share with Mini PCI-E)
Audio	Realtek ALC662 HD Audio CODEC with 2-Channel
Ethernet LAN	2 * RTL8111F-CG Gigabit LAN
USB	Embedded 7 * USB 2.0/1.1
LVDS	Onboard 1 * 24-bits Dual channel LVDS connectors

Rear Panel I / O	4 * USB 2.0/1.1 ports 2 * RJ-45 ports Line-out port 1 * DVI-I port 1 * 12V DC-IN JACK
Internal I / O	2 * USB 2.0 header for 3 * USB 2.0 ports 1 * Audio header System/Chassis/NB Fan Connectors 1 * GPIO header 1 * CFast card reader socket DIY switch x2 (reset & power button) 4 * COM header (COM2~4 for RS232, COM1 for RS232/422/485)
BIOS	AMI 32MB SMT Flash ROM
Form Factor	3.5" SBC form factor (148mmx102mm)
Certificate	CE,FCC,RoHS,ERP
Functional	ATM, Automation, Medical Equipment, Security, General Application, Transportation, Digital Signage, Kiosk, POS machine, LCD TV PC, Embedded Fanless application
Temperature	Operating within 0~60 centigrade Storage within -20-85 centigrade