


149.00 EUR
 incl. 19% VAT, plus [shipping](#)

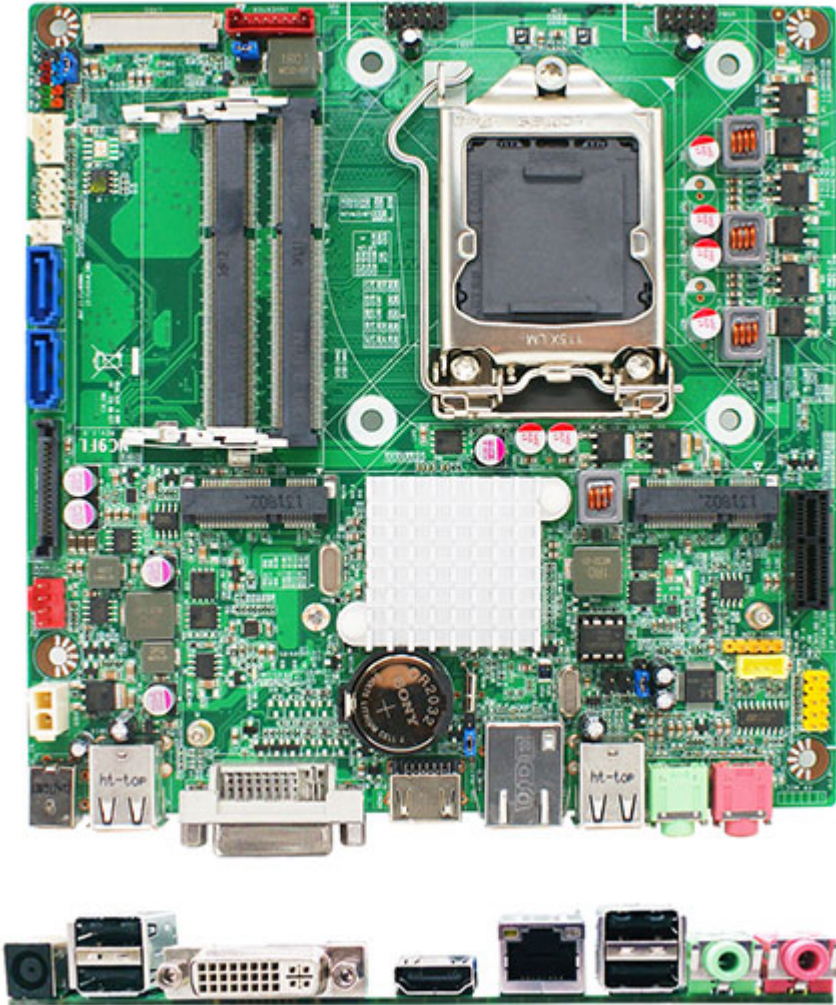

- INTEL® H61 Chipset
- Support INTEL® LGA 1155 Socket Core i3/i5/i7 & Pentium Processor
- 2 * Dual Channel SO-DIMM DDR3-1333/1066 up to 16GB
- Support CPU Smart FAN
- Supports 1 * Gigabit LAN
- Supports ACPI S3 Function
- Support Watch dog Technology
- Thin Mini ITX form factor

• CPU	• INTEL® LGA 1155 Socket Core i3/i5/i7 & Pentium Processor
• Chipset	• INTEL® H61 Chipset
• Memory	• 2 * SO-DIMM Sockets Dual Channel DDR3 1066/1333 SDRAM up to 16 GB
• Expansion Slots	• 1 * PCIe x 1 • 1 * half size Mini PCI-E socket
• Storage	• 2 * Serial ATA2 3Gb/s connectors • 1 * full size mSATA socket (mSATA only)
• Audio	• Realtek ALC662-VD-GR 6-Channel HD Audio CODEC
• Ethernet LAN	• IN82579 PCI-E Gigabit Ethernet LAN *1
• USB	• Embedded 8 * USB 2.0/1.1
• Special Features	• Support ACPI S3 • Support CPU Smart FAN • Support Watch Dog

• Rear Panel I / O	<ul style="list-style-type: none"> • 4 * USB 2.0/1.1 ports • 1 * HDMI • 1 * 19V DC-in jack • 1 * RJ-45 port • 1 * DVI-I port • 1 * MIC-in & 1 * Line-out jacks
• Internal I / O	<ul style="list-style-type: none"> • 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports • CPU /System Fan connectors; • 1 * 24-bits Dual CH LVDS & 1 * Inverter connector • 1 * CIR header • 1 * AUDIO header • 1 * Speaker header • 1 * DMIC header • 1 * Front panel header • 1 * Monitor switch header • 1 * 2-pin ATX Power connector
• BIOS	• AMI 8Mb DIP Flash ROM
• Form Factor	• Thin Mini ITX Form Factor (170mm x 170mm)
• Functional	• ATM, POS, AIO, Digital Signage
• Certificate	• CE, FCC, RoHS
• Temperature	<ul style="list-style-type: none"> • Operating within 0~60 centigrade • Storage within -20-85 centigrade