


289.00 EUR  
incl. 19% VAT, plus [shipping](#)

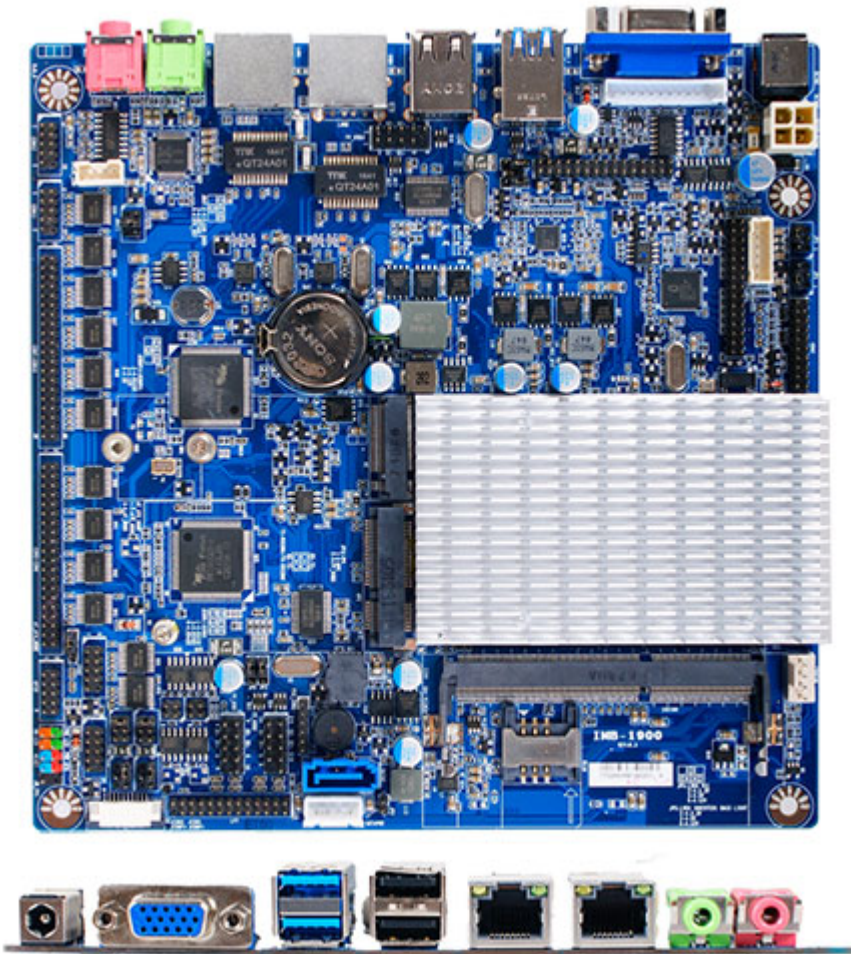

- Intel Celeron J1900 SoC Processor
- Up to 2 Displays, VGA, HDMI Header, 24-bit LVDS
- 12 \* Serial Ports (10\*RS232, 2\*RS232/422/485/TTL)
- 2 \* Gigabit LAN Ports, 1 \* M.2 SATA 2242/2260
- Built-in +12V DC Power Jack
- ECO-design for EuP/ErP

<b>Chipset</b>	<ul style="list-style-type: none"> <li>- INTEL® Celeron™ J1900 (2.0 GHz) quad-core processor</li> <li>- 2 Phase CPU Power Support</li> </ul>
<b>I.O Chipset</b>	<ul style="list-style-type: none"> <li>- FINTEK F81866AD-I</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>- 1*SO-DIMM slot</li> <li>- Support DDR3L 1333</li> <li>- Max. capacity of system memory up to 8GB</li> </ul>
<b>Expansion Slots</b>	<ul style="list-style-type: none"> <li>- 1* Mini PCI-E connector</li> </ul>
<b>Storage</b>	<ul style="list-style-type: none"> <li>- 1* Serial ATA2 3Gb/s connector</li> <li>- 1* M.2 Connector(2242/2260)</li> </ul>
<b>Audio</b>	<ul style="list-style-type: none"> <li>- ALC662 Audio CODEC</li> <li>- HD Audio CODEC</li> </ul>
<b>Ethernet LAN</b>	<ul style="list-style-type: none"> <li>- REALTEK® RTL8111G Chip</li> <li>- 2* PCI Express Gigabit LAN</li> </ul>
<b>LVDS</b>	<ul style="list-style-type: none"> <li>- Onboard 24-bit Dual channel</li> </ul>
<b>USB</b>	<ul style="list-style-type: none"> <li>- 1* USB3.0 Port</li> <li>- 9* USB 2.0 (3 distribute in back panel, 6 distribute in mid-board)</li> </ul>

<b>Special Features</b>	<ul style="list-style-type: none"> <li>- Support CPU Smart Fan</li> <li>- Support Watch dog Technology</li> <li>- Support GPIO Technology</li> <li>- Support VGA header</li> <li>- Support HDIM header</li> <li>- Support Power On board</li> <li>- Support Amplifier function(3W)</li> <li>- Support 2*RS422/RS485/RS232 COM ports</li> <li>- COM1/COM2 Support TTL</li> <li>- Thunder Protection Function</li> <li>- All Solid Capacitor design</li> <li>- All Power Pack MOSFET design</li> </ul>
<b>Back Panel I / O</b>	<ul style="list-style-type: none"> <li>- 1* USB3.0 port</li> <li>- 3* USB 2.0 ports</li> <li>- 2* RJ-45 ports</li> <li>- 1* Line-out connector</li> <li>- 1* MIC</li> <li>- 1* VGA port</li> <li>- 1* 12V DC in</li> </ul>
<b>Internal I / O</b>	<ul style="list-style-type: none"> <li>- 3* USB 2.0 headers for 6 USB 2.0 ports</li> <li>- 1* CPU / Chassis Fan connectors</li> <li>- 12* COM headers(COM1/COM2 For RS422/RS485/RS232 and TTL )</li> <li>- 1* Parallel header</li> <li>- 1* PS2/KB header</li> <li>- 1* 4-pin ATX 12V Power connector</li> <li>- 1* 4-pin SATA Power connector</li> <li>- 1* 15-pin VGA header</li> <li>- 1* 20-pin HDMI header</li> <li>- 1* 24-bit Dual Channel LVDS header</li> <li>- 1* GPIO header</li> <li>- 1* Mini PCI-e connector</li> <li>- 1* M.2 Connector(2242/2260)</li> <li>- 1* SATA Connector</li> <li>- 1* Speaker header(Amplifier function 3W)</li> <li>- 1* Front panel header</li> <li>- 1* SIM Card socket</li> </ul>
<b>BIOS</b>	<ul style="list-style-type: none"> <li>- AMI 64MB SPI ROM</li> </ul>
<b>Form Factor</b>	<ul style="list-style-type: none"> <li>- Thin mini ITX Form Factor(170mm X 170mm)</li> </ul>