


289.00 EUR

 incl. 19% VAT, plus [shipping](#)

- JNF894-3455

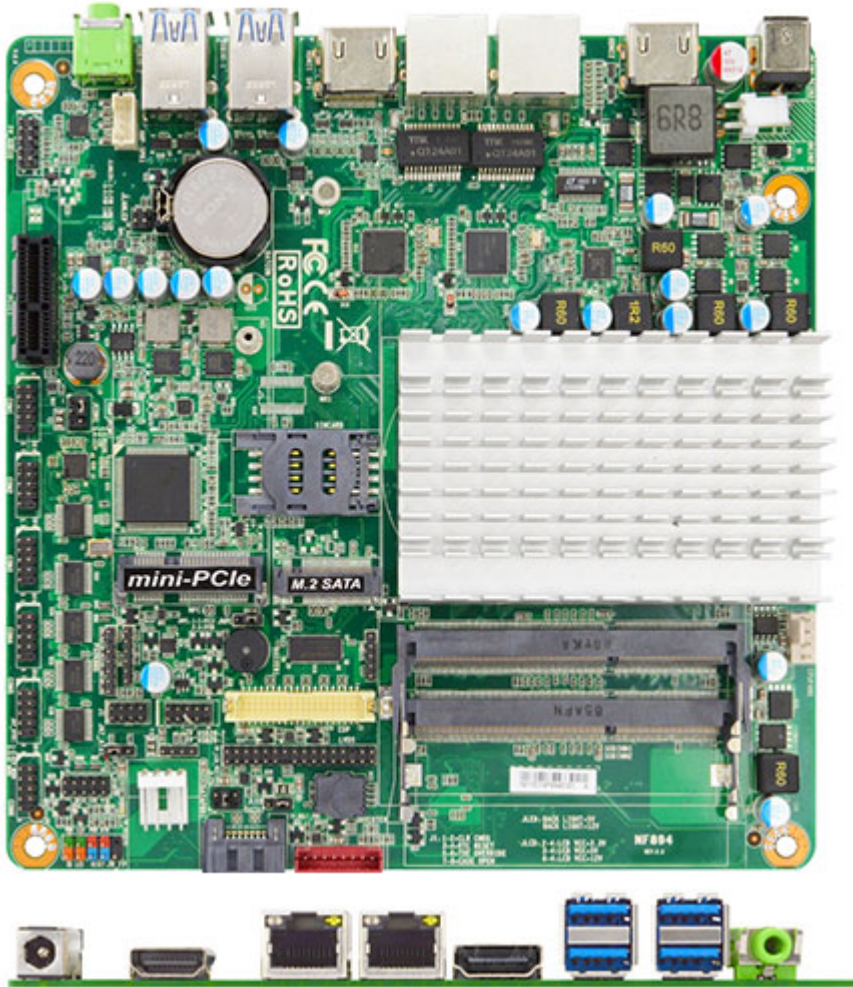

The JETWAY JNF894-3455 is Slim Mini-ITX form factor board adopts the Intel® Apollo Lake SoC Processor. The board supports DDR3L 1867Mhz SO-DIMM memory, up to 8GB. Featuring the integrated two Intel Gigabit Ethernet controllers, the JNF894 offers 10/100/1000Base-TX Ethernet devices for network transmission. SATAIII (6Gb/s) interface, one M.2 (M-key, 2242/2280) and 32 GB eMMC (option) offer storage devices. One Mini PCIe interface, four USB3.0 ports, three USB2.0 ports and six COM ports provide versatile expansion. The JNF894 offers two HDMI interface which can support max. 3840x2160@30Hz resolution. Because of the above features, JNF894 is one of the best selections for industrial automation and industrial PPC applications.

- Intel® Apollo Lake SoC Processor
- 2* DDR3L SODIMM up to 8 GB
- Support 2 * HDMI + 1* LVDS (option with eDP)
- 2* 10/100/1000 Base-TX Ethernet Ports
- 6* COM, 4* USB3.0 & 3* USB2.0
- 1* PCIe x1 slot, 1* Mini PCIe slot (1* full size), 1* M.2 (M-key, 2242/2280)
- Support 1 * SATA III (6Gb/s), 32 GB eMMC (option)
- 9~36V DC-in

Model / Part Number	
Model	– JNF894-3455
Part Number	– JNF894-3455
Form Factor	
Dimensions	– Mini-ITX (6.7-in * 6.7-in, 170 * 170mm)
Processor System	
CPU	– Intel® Apollo Lake SoC Processor
Core Number	– (by CPU)

Max Speed	– (by CPU)
L2 Cache	– (by CPU)
Chipset	– SoC
BIOS	– AMI Flash ROM
Expansion Slot	
Mini-PCIe	– 1 (full size)
PCIe	– 1 * PCIe x1
M.2	– 1 (M-key, 2242/2280)
SIM Card Holder	– 1
Memory	
Technology	– Dual CH DDR3L 1867MHz SDRAM
Max.	– 8GB
Socket	– 2 * SO-DIMM
Graphics	
Controller	– Intel® HD Graphics
VRAM	– Shared Memory
LVDS	– 1 (Max Resolution: 1920 x 1080@60Hz) (Selectable with eDP, not working while using LVDS)
eDP 1.3	– 1 (Max Resolution: 3840 x 2160@60Hz) (Selectable with LVDS, not working while using eDP)
HDMI 1.4	– 2 (Max. Resolution : 3840 x 2160@24Hz) (one option with DP, Default HDMI)
DisplayPort 1.2	– 1 (Max Resolution: 4096 x 2160@60Hz) (option with HDMI)
Multi Display	– Triple Displays
Ethernet	
Ethernet	– 10/100/1000 Mbps
Controller	– PCIe GbE: Intel i211AT
Connector	– 2 * RJ45
Audio	
CODEC	– HD Audio: Realtek ALC662VD
Channel	– 2 Channel
SATA	
SATA	– 1 * SATAIII (6.0Gb/s)
eMMC	– 32 GB (option)
M.2	– 1 * M-key 2242/2280 for SATA interface
Rear I/O	
HDMI	– 2 (default)
DisplayPort	– 1 (option with one HDMI)
Ethernet	– 2
USB	– 4 * USB 3.0
Audio	– 1 (Line-out)
DC-input	– 1
Internal Connector	
USB	– 3 * USB 2.0
PS/2	– 1
LVDS / inverter	– 1

eDP	- 1
Serial	- 6 (COM1 support RS232/422/485 W/power)
SATA	- 1 * SATAIII (6.0Gb/s)
mPCIe	- 1 (full size)
M.2	- 1 (M-key, 2242/2280)
GPIO	- 1 (8 bit)
Chassis intrusion	- 1
Audio Header	- 1
SMBUS	- 1
AT mode	- 1
TPM	- 1 (on board option)
Others	- 0
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 10sec...255min
Power Requirements	
Input PWR	- 9~36V DC-in
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: 0°C ~ 60°C (with 0.7m/s air flow)
	- Storage: -20°C ~ 85°C
	- eMMC: 0°C ~ 70°C
Warranty	
Warranty	- 2 Years Limited Warranty