


209.00 EUR  
incl. 19% VAT, plus [shipping](#)

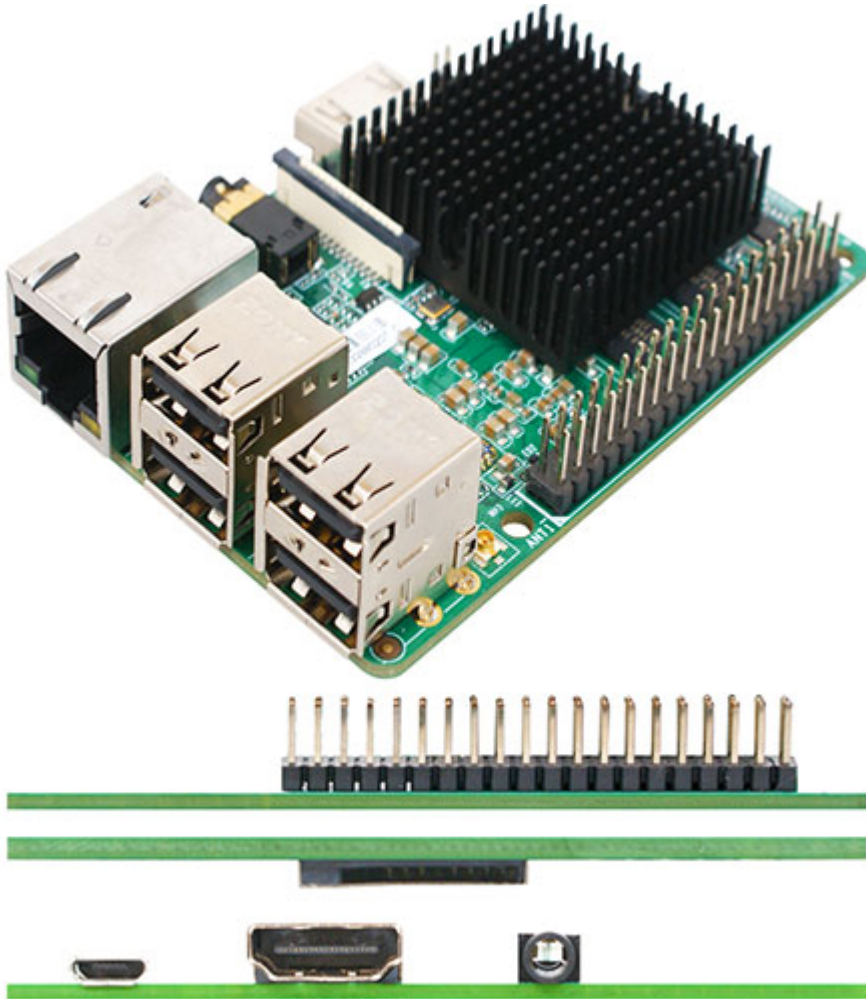

- Rockchip® ARM Cortex A17 RK3288 Quad-core 1.8GHz
- On board 1333/2GB DDR3L DRAM up to 4GB
- On board 8G Flash ROM up to 64GB
- 1\* Realtek GbE, 1\* 26bit GPIO, 4\* USB2.0, 1\* OTG, 1\* HDMI, 1\* MIPI DSI, 1\* MIPI CSI
- 1\* Micro SD up to 64GB
- Support 802.11 b/g/n 2.4G, BT-V4.0
- Support Android 5.1 and Debian9.0

<b>Model</b>	
Model	– JR3288A-DG2N
Part Number	– JR3288A-DG2N
<b>Form Factor</b>	
Dimensions	– 85 * 56mm (1.8")
<b>Processor System</b>	
Processor/CPU	– Rock Chip® ARM Cortex A17 RK3288 Quad-core 1.8GHz – Rock Chip® RK808-B PMU
<b>Memory</b>	
DRAM	– Onboard DDR3L 1333MHz 2GB
<b>Expansion Slot</b>	
Dimensions	– 1* Micro SD
<b>Graphics</b>	

Graphics	<ul style="list-style-type: none"> <li>- Mali T764 GPU, shared memory</li> <li>- 1* HDMI (Max Resolution: 1920x1080@60Hz)</li> <li>- 1* MIPI DSI (Max Resolution: 1920x1080@60Hz)</li> <li>- Support Dual Displays</li> </ul>
<b>Ethernet</b>	
Ethernet	- 1* Realtek RTL8211E-VB GbE
Wifi	- 1* Realtek RTL8723BS 802.11b/g/n 2.4G WIFI and BT-V4.0
<b>Audio</b>	
Audio	- 2 channel HD audio: ES8316
<b>Storage</b>	
Storage	- 8GB Flash ROM (Max 64GB)
<b>I/O Port</b>	
Rear I/O	<ul style="list-style-type: none"> <li>- 1* OTG (OTG Co-lay DC Jack 5V)</li> <li>- 1* HDMI</li> <li>- 1* AUDIO</li> <li>- 2* USB2.0 (Left Side)</li> <li>- 1* Ethernet (Left Side)</li> <li>- 1* Micro SD (Right Side)</li> </ul>
Internal I/O	<ul style="list-style-type: none"> <li>- 26bit GPIO</li> <li>- 1* MIPI DSI</li> <li>- 1* MIPI CSI</li> <li>- 1* I2C</li> </ul>
<b>Watchdog Timer</b>	
Watchdog Timer	<ul style="list-style-type: none"> <li>- From Super I/O to drag RESETCON#</li> <li>- 256 segments(10sec ~ 255min)</li> </ul>
<b>Power</b>	
Power	5V DC-in(PWR Con) <ul style="list-style-type: none"> <li>- AT : Directly PWR on as Power input ready</li> <li>- ATX: Press Button to PWR on after Power input ready</li> </ul>
<b>Compliance</b>	
Certifications	- CE, FCC, LVD, RoHS, REACH
<b>Environment</b>	
Temperature	<ul style="list-style-type: none"> <li>- Operating: -10°C ~ 60°C</li> <li>- Storage: -20°C ~ 70°C</li> </ul>
<b>Warranty</b>	
Warranty	- 2 Years Limited Warranty