


79.95 EUR  
incl. 19% VAT, plus [shipping](#)

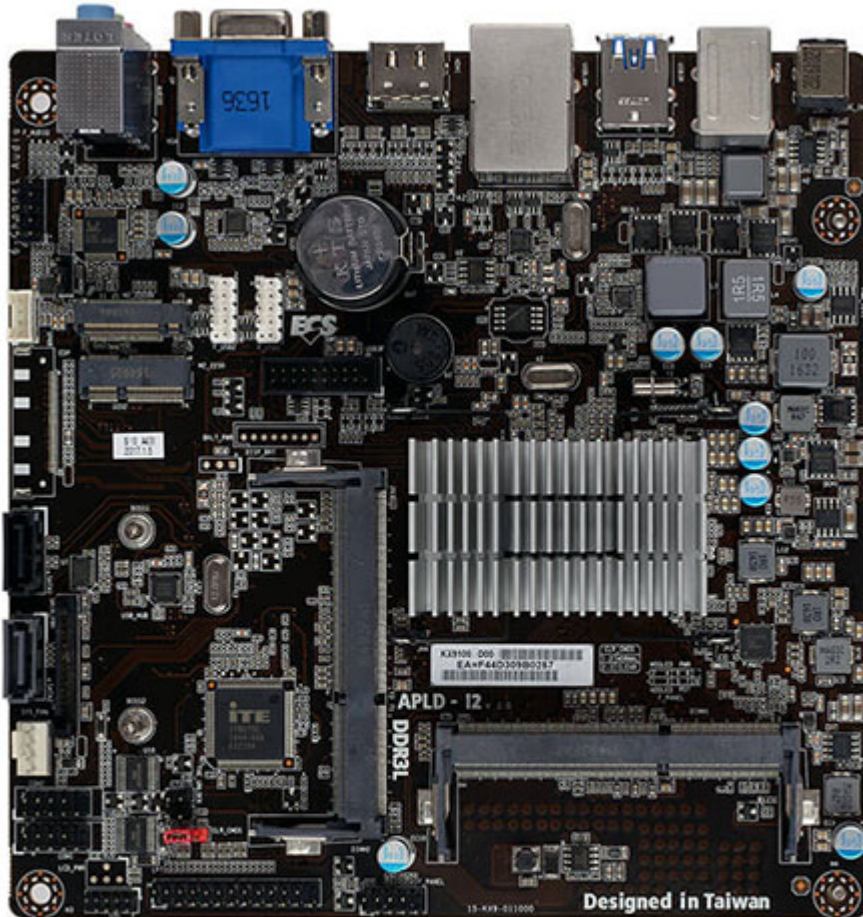

- Applied 100% Solid capacitor design to maximize component reliability
  - ECS Durathon Technology ensure the stability, reliability and performance of system.
  - ESD Protection prevents computers from electrostatic discharge damage to enhance its durability and lifespan
  - ECS MIB III - A friendly interface for overclocking
  - DC-in power jack
  - Supports DirectX® 12 to enhance graphical performance
  - Supports Intel® HD Graphics
  - Supports HDMI 1.4a Technology ( resolution up to 1920X1200 ) and HDCP function
- Supports Intel® CNVi

**CPU** Onboard Intel® Apollo Lake processors  
100% Solid capacitor design

**GRAPHICS** Supports DirectX® 12  
Supports HDMI 1.4b & Premium Audio

<b>MEMORY</b>	<p>Dual-channel DDR3L Memory architecture Supports DDR3L 1066 non-ECC, Un-buffered SO DIMM Memory 2 X DDR3 SO-DIMM socket Support up to 8 GB*</p>
<b>EXPANSION SLOT</b>	<p>1 X M.2 slot for 2242/2280 SSD 1 X M.2 slot for WiFi/BT PCIe Gen 2</p>
<b>Storage</b>	<p>2 X Serial ATAIII 6Gb/s</p>
<b>Audio</b>	<p>6-Channel HD audio CODEC Realtek ALC662 Realtek ALC662 6-channel High Definition audio CODEC Meets performance requirements for Microsoft WLP 3.08 Vista premium and mobile PCs Six channel DAC supports 16/20/24-bit PCM format for 5.1 channel audio solution Emulation of 26 sound environments to enhance gaming experience Voice Cancellation and Key Shifting in Karaoke mode Compatible with Direct Sound 3D™, A3D™, I3DL2</p>
<b>LAN</b>	<p>Realtek 8111H Gigabit Fast Ethernet Controller</p>
<b>USB</b>	<p>4 X USB3.1 Gen1 port(s) up to 5Gb/s (either rear I/O or front header) 6 X USB2.0 port(s) Up to 480 Mb/s [Back Panel 2 port(s), Onboard 4 port(s)] 1 X PS/2 Keyboard &amp; PS/2 mouse connectors</p>
<b>REAR PANEL I/O</b>	<p>1 X Audio port (Line Out/Line In/Mic In) 1 X RJ-45 port 1 X HDMI port(s) 1 X D-Sub (VGA) port(s) 1 X Display port(optional instead of D-SUB (VGA)) 2 X USB3.1 Gen1 port(s) 2 X USB2.0 port(s) 1 X DC-in 19V Connector</p>

	1 X 4-pin SYS_FAN connector
	1 X Front Panel MIC/Speaker out header
	1 X Front panel audio header
	1 X USB 3.1 Gen1 header (Support additional 2 USB ports)
<b>CONNECTORS &amp; HEADERS</b>	2 X USB 2.0 header (Support additional 4 USB ports)
	1 X CLR_CMOS header
	2 X Serial port header (COM)
	1 X Parallel port header (LPT)
	AMI BIOS with 128 MB SPI Flash ROM
	Supports M.I.B III Utility
<b>SYSTEM BIOS</b>	F7 hot key for boot up devices option
	Dual Display
	Support GUI UEFI BIOS
	Multi-Language BIOS
<b>FORM FACTOR</b>	Mini ITX Form Factor
	170*170
<b>OS Support</b>	Windows 10 64-bit
	CE/FCC Certification
<b>Certifications</b>	ErP/EuP Certification
	WHQL Certification