


598.00 EUR
 incl. 19% VAT, plus [shipping](#)

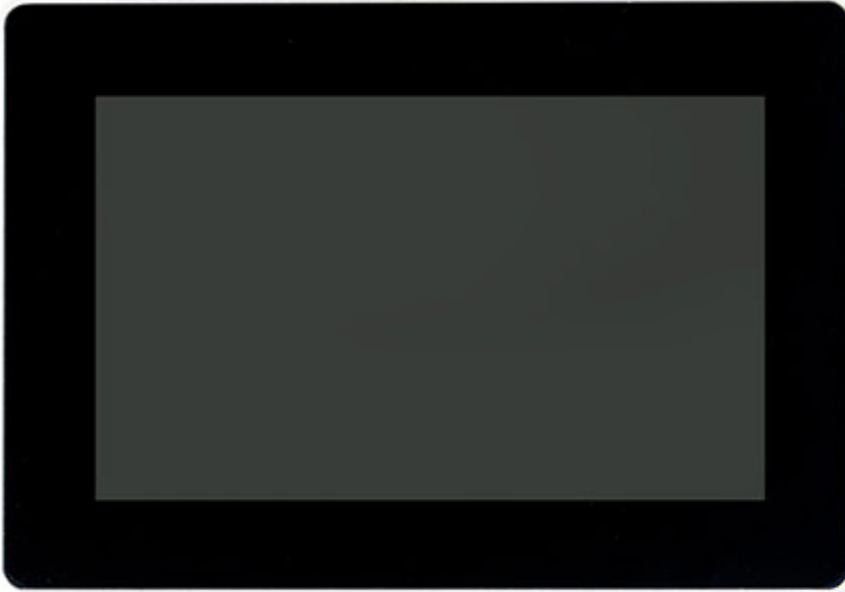

- 7" 320 nits high brightness TFT LCD with LED backlight
- 10-points Multi Capacitive Touch
- Streamlined enclosure for highly efficient heat dissipation
- Enclosed in robust aluminum casing
- Edge-to-edge narrow bezel design and Fanless cooling system
- Design for easy Wall mount, Panel Mount, VESA Mount installation
- A true Flat, easy-to-clean front surface with edge-to-edge design
- Front bezel meets IP65-rated protection

Jetway HPC070SC-FP2807A Flat-PanelFanless Panel PC provides outstanding outlook with industrial-grade quality for comprehensive industrial markets, such as retails, wholesales, hospitality, hospital or meeting room registration, logistics, self-service kiosk, residential automation and digital signage.

Jetway HPC070SC-FP2807A Flat-PanelFanless Panel PC is designed with 10-points Multi capacitive type touch screen. High brightness TFT LCD panel with LED backlight are equipped with this model. Streamlined enclosure with narrow bezel design.

Jetway HPC070SC-FP2807A Flat-Panel Fanless Panel PC are designed with a true flat, easy-to-clean front surface with edge-to-edge design. It is designed mounting clips for easy Wall mount, Panel Mount, VESA Mount installation.

Front bezel meets IP65-rated & NEMA 4 protection. Welcome to use Jetway Flat-Panel Panel PC.

Display	
Front Bezel	- IP65, NEMA 4 rugged protection, Full planar metal border

Display Type	- 7" With LED Backlight
Brightness (cd/m ²)	- 320 nits
Display Color	- 16.7M
Resolution	- 1024 x 600 @ 60Hz
Viewing Angle (H/V)	- 150°/145°
Pixel Pitch	- 0.15 x 0.15 mm
Aspect Ratio	- 16:9
Contrast Ratio	- 500:1
Response Time	- 30 ms
Touch Screen	
Type	- projected capacitive type
Active Range	- 152.40 x 91.44mm ±0.2mm
Transparency	- ■85%
Surface Hardness	- ■6H (JIS-5400)
Glass haze value	- ■ 3%
CASE	
Panel Material	- Aluminum
Case Material	- Iron
Color	- Silver + white
Coating Requirement	- Spray Paint
Main System	
CPU	- Intel® Bay Trail-M N2807 1.58GHz/DC
RAM	- 2G 1333MHz DDR3L SAMSUNG DRAM
BIOS	- 64MB SPI Flash ROM
Storage	- 1 * mSATA connector (Full size)
Watchdog Timer	- 256 levels, 0~255 sec.
OS Support	- Windows 7 / 8.1 / 10 / Linux (Option)
I/O Connector	
I/O Ports and Switches	- 1 * USB3.0 - 1 * USB2.0 - 1 * RS232/422/485 - 1 * HDMI - 1 * LAN (Gigabit LAN) - 1 * Euro terminal block by 12V DC input - 1 * Power button
Expansion Interface	
Expansion	- 1 * PCI-E mini card for WIFI or 3G/4G
Power	
Power Input	- Supports 12V DC Power in with over current protection fuse - Provides 100~240V AC-DC 12V, 60W power adapter
Power Consumption	- 13W
Dimension	
Case Dimensions	- 197.0*136.0*50.7mm
Certifications	
Certifications	- CE, FCC, IP65(Front)
Environment	

Temperature	<ul style="list-style-type: none"> - Operating Temperature: -10 ~ 60° C (with W.T. DRAM/HDD in airflow condition) - Storage Temperature: -20 ~ 85° C
Shock	<ul style="list-style-type: none"> - Operating: 15G■11ms duration
Vibration	<ul style="list-style-type: none"> - Operating: 5~500Hz/1 Grms
Warranty	
Warranty	<ul style="list-style-type: none"> - 2 Years Limited Warranty(Panel and Touch is only Warranty 1 Year)