




104.95 EUR
 incl. 19% VAT, plus [shipping](#)

- GPS/GLONASS/GSM/UMTS/3G !
- WLAN / Bluetooth !
- Active antenna !
- SMA connectors !

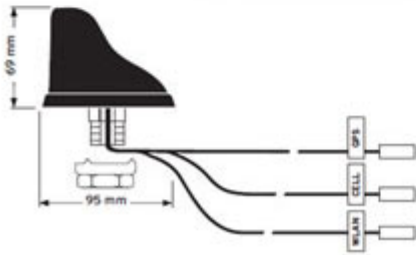

Combined Roof mount antenna "CGNW 702659 SF S/SMA 3.0" for Fleet management systems, Navigation, Telematics applications in association with WLAN. Successor model of art. 602392001 and 955001004.

	Environmental conditions
Temperature range	-40° - +85° C
Protection class	IP 6k9K (acc. ISO 20653)
	Mechanical construction
Housing material	PA6
Weight	178 g
Dimensions (W x H x D)	95 x 57 x 72 mm
	Installation
Tightening torque	max. 5 Nm
	GNSS (GPS/GLONASS)
Frequency range	GPS: 1,575 MHz - 1610 MHz GLONASS: 1602,0 - 1614,94 MHz
Return loss (VSWR)	> 12 dB
Impedance	50 Ohm
Gain	typ. 2 dBic
Amplification	27 dB +3 dB
Noise figure	< 1,9 +- 0,3 dB
Voltage supply	2,9 - 5,5 VDC (ferngespeist)
Current consumption	<=12 mA +/- 3 mA at 3,3 V
Cable type	RG 174

Cable length 5000 mm
Connector SMA male

CELLULAR

Frequency range
 LTE-LB: 698-862 Mhz
 LTE-HB: 2305-2690 Mhz
 GSM 850: 824 - 894 MHz
 GSM 900: 880 - 960 MHz
 GSM 1800: 1710 - 1880 MHz
 GSM 1900: 1850 - 1990 MHz
 UMTS: 1920- 2170 MHz

Impedance 50 Ohm
 Return loss (VSWR) > 12 dB
 Decoupling > 40 dB
 Rod wave 1/4
 Rod gain 2,5 dBi
 Cable type RG 174
 Cable length 5000 mm
 Connector SMA male

WLAN

Frequency range
 Bluetooth: 2400 - 2484 MHz
 IEEE Std. 802.11b/g: 2412 - 2484 MHz
 IEEE Std. 802.11p: 5755-5925 Mhz

Impedance 50 Ohm
 Return loss (VSWR) > 12 dB
 Gain 2.5 dBi @ 2.4 GHz; +3 dBi @ 5.8 GHz
 Load capacity max. 1 W (acc. IEEE 802.11b/g)
 Cable type RG 174
 Cable length 5000 mm
 Connector SMA male